


Front Wheel Alignment

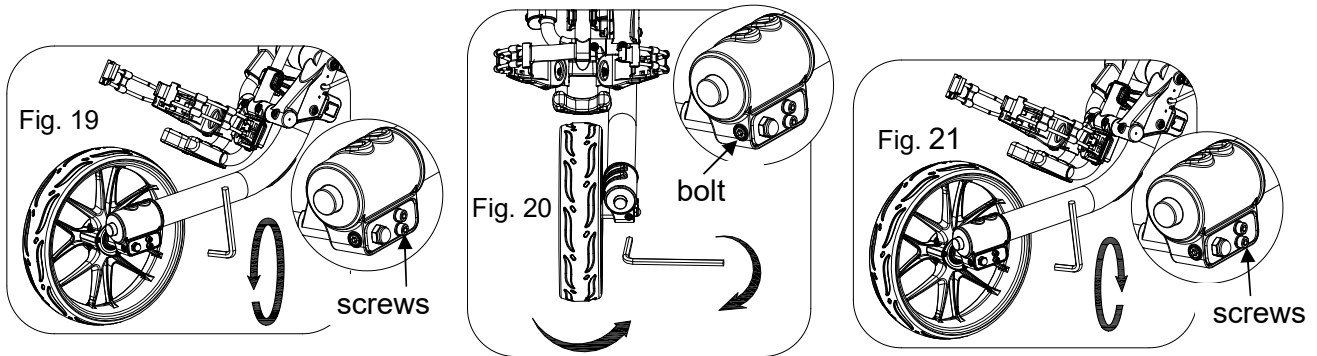

If the cart veers to the right:

Step 1: Face the front wheel of the cart and use the provided Allen wrench to loose the two side screws as in fig. 19.


Step 2: Then use the Allen wrench to adjust the front bolt clockwise until the front wheel is centered as in Fig. 20. Then tighten the two side screws as in fig. 21.

If the cart veers to the left:

Step1: The same as above.

Step 2: Adjust the front bolt counterclockwise until the front wheel is centered as in fig.20. Then tighten the two side screws as in fig. 21.

Bag Holder Strap Length Adjustment

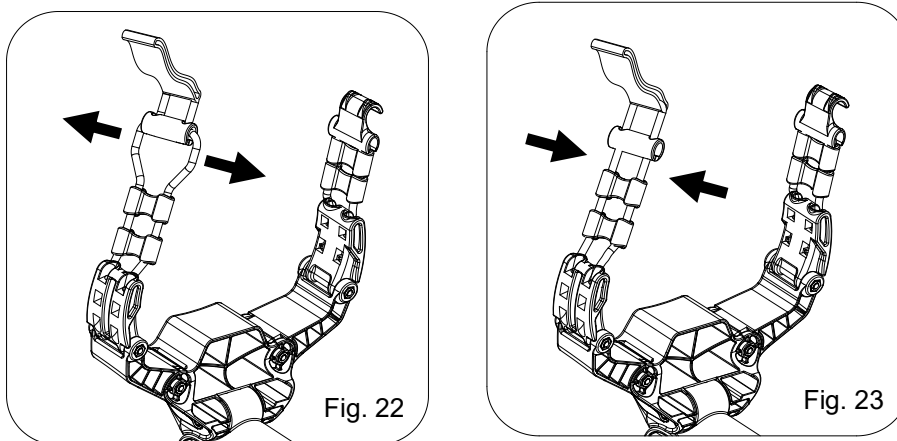

Refer to the Fig. 22 & Fig. 23:

1. Pull the elastic strap out of the strap buckle as in fig. 22
2. Adjust the strap to the desired length.
3. Push the elastic strap back to the strap buckle as in fig. 23